Collection that brings new technologies to the surfaces of architecture to revolutionize the decoration of any ceramic piece.

A decoration based on the selective metallization of surfaces that allows the creation of unique and totally personalized designs to obtain exclusive pieces.

Undoubtedly, a great choice to create different, unique and full of personality spaces.

Colección que aporta nuevas tecnologías hasta las superficies de la arquitectura para revolucionar la decoración de cualquier pieza cerámica.

Una decoración basada en la metalización selectiva de superficies y que permite crear diseños únicos y totalmente personalizados para obtener piezas exclusivas.

Sin duda, una gran elección para crear espacios diferentes, únicos y llenos de personalidad.



Selective Collection

Metrik


METRIK is inspired by ceramic lattices, used to improve exterior and interior spaces, giving meaning to the term form and function, providing elegance and decorative beauty.

The division of spaces takes on a new dimension through this proposal based on different highly decorative geometric and organic shapes.

METRIK es una serie inspirada en las celosías cerámicas, utilizadas para mejorar los espacios exteriores e interiores dando sentido al término forma y función, proporcionando elegancia y belleza decorativa. La división de espacios adquiere una nueva dimensión mediante esta propuesta basada en diferentes formas geométricas y orgánicas muy decorativas.





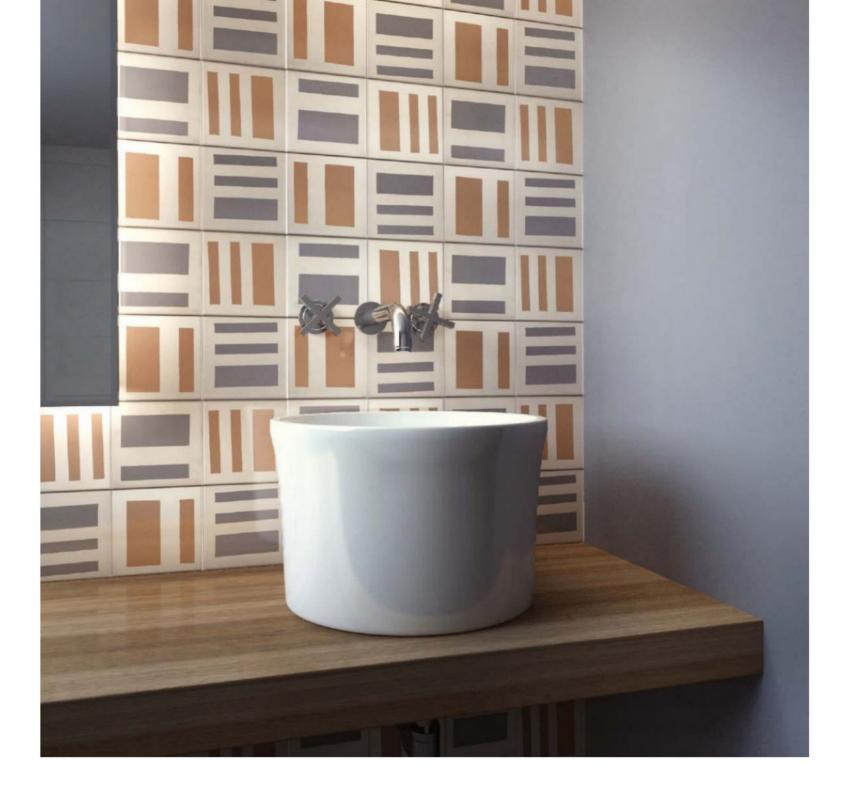


Metrik

White body / Pasta blanca
Thickness: 7mm(0,26") / Espesor: 7mm
Not rectified / No rectificado



15x15 cm 6"x6"

Matt Finish / Acabado Mate
Wallcovering use / Revestimiento de paredes
Indoor / Interior

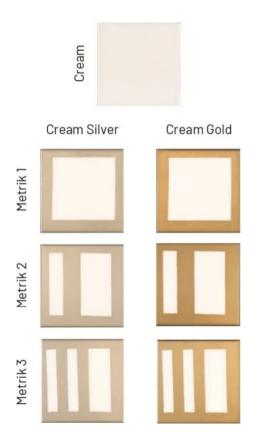





Technical Data

Laying advice

1. Choosing a ceramic tile

When choosing a ceramic tile to cover a certain surface, attention must be paid to a series of aesthetical (color, design, texture, etc.) and technical (physical-chemical features, etc.) conditions. The technical factors for an adequate choice will depend on the specific situation, weather conditions in region, and expected use. The ceramic pieces contained in this catalog are decorated with a thin metal application. Manipulate with special care. Improper handling (scratching and/or scraping) and improper use of abrasive detergents can damage the pieces. Treat these in particular with extreme careful.

These products are not suitable for wet areas like public spas or swimming pools where aggressive saline and/or disinfectant products like bleach are used.

2.Initial verification

Prior to placing the ceramic tile, the client should check that it is in agreement with the requested features (model, quality, shape, tone, gage, etc.). If any ceramic piece is defective, do not use and communicate this to your provider. Not accept any claims once placed the product.

3. Lay out

It is recommended that the layout of the product is prepared be- fore the final installation. The surface for placing the tiles must be flat, firm, stable, compatible with the binding material, and clean.

We recommend using cement glue with polymeric additives as fit-ting material. Recommended product: **H40 (Kerakoll)**

Before preparing the binding material, check the manufacturer's indications (way to use, etc).

The bonding materials are applied with a notched trowel to ensure optimal distribution across the surface. Should be avoided that the residues of fitting material get dry, remaining adhered on the surface of pieces, using a slightly damp sponge to clean the tile joints, passing it diagonally across them. Do not use dirty or brackish water.

4. Jointing

For technical reasons, it is not advisable to lay ceramic tiles with- out the corresponding layout joint.

For choosing the jointing material, one should take into account the place where the tiles (floor or wall) are fitted and their situation (indoor or outdoor), the use of joints with polymeric additives or synthetic resins being recommendable, and not Portland cement grout.

Recommended product: Fugalite / Fugabella (Kerakoll)

5.Cleaning

Do not use commercial products known as cement removers or scale removers, acid solutions used mainly to remove cement debris (work debris).

For cleaning excess installation materials before they have dried, use a sponge and plenty of water.

For subsequent cleanings we recommend the use of a soap damp-ened in water and neutral soap. Do not use powder detergents, nor metallic mops or abrasives. Do not use abrasive, acidic or alkaline cleaning products. Use a soft sponge with liquid soap and water to clean the tiles, and then dry them with a fine cloth.

Recommended product: Fuga Soap (Kerakoll)

Uses complete list

	Indoc	is outd	oots wall	¢100	, light traffic	nedium tro	El Mall	ei ^{lloot}	Purcondensation at his party of the condensation of the condensati
SERIE									
Abstra	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
Rake	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
House	\checkmark	/	\checkmark			\checkmark		\checkmark	
Framed	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
Mist	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
2Lines	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
Slate	\checkmark	\checkmark	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	
Urban	\checkmark	\checkmark	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	
Artic	√	\checkmark	√	\checkmark		\checkmark	√		
Fusion	\checkmark	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	
Tempo	\checkmark	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	
Jurgen	\checkmark	\checkmark	\checkmark			\checkmark		\checkmark	
Metrik	\checkmark		\checkmark			\checkmark		\checkmark	
Kondo	\checkmark		\checkmark			\checkmark		\checkmark	
Trames	√		√			√		\checkmark	_
2Moreone	\checkmark		\checkmark			\checkmark		\checkmark	
Cottage	\checkmark		\checkmark			\checkmark		\checkmark	
Become	\checkmark		\checkmark			\checkmark		\checkmark	
2Geom	\checkmark		\checkmark			\checkmark		\checkmark	
Cosmos	\checkmark		\checkmark			\checkmark		\checkmark	